

Product Data Sheet

BikerShield™




Last Updated: March 2025

Rider Containment Level	EN 1317-8
Rider Impact Condition	86 kg rider, 60km/h, 30°
Standard Panel Length	4.0 m
Bracket Spacing	2.0 m
Bracket Attachment	Rear of guardrail panel, mid-span between posts
Panel Height	370 mm
System Mass	8.5 kg per metre
System Finish	Hot dip galvanized
Compatible Barriers	RamShield® W-Beam Guardrail
	RamShield® W-Beam Low Deflection
	RamShield® High Containment




Product Data Sheet


BikerShield™

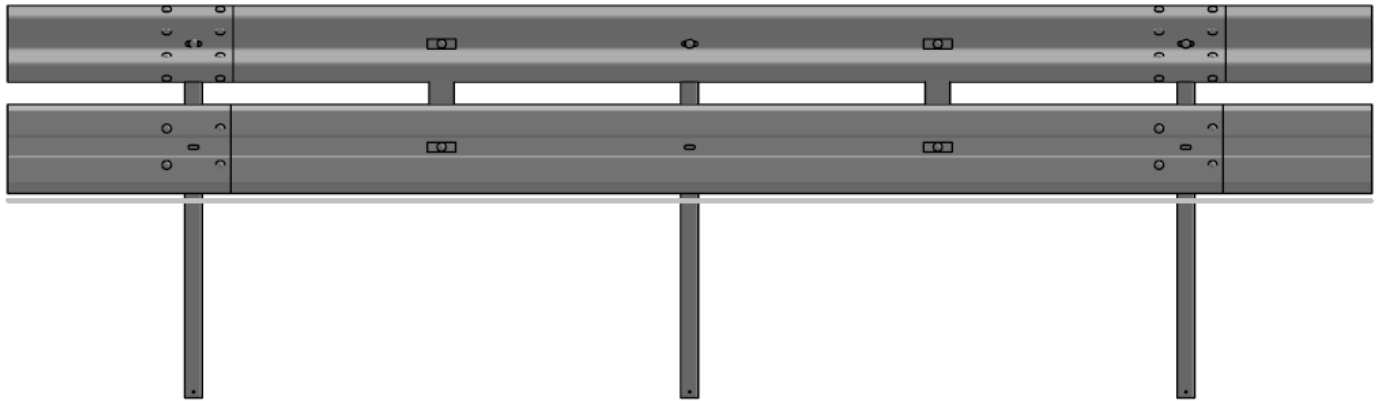

Attachment to RamShield® W-Beam
FRONT VIEW

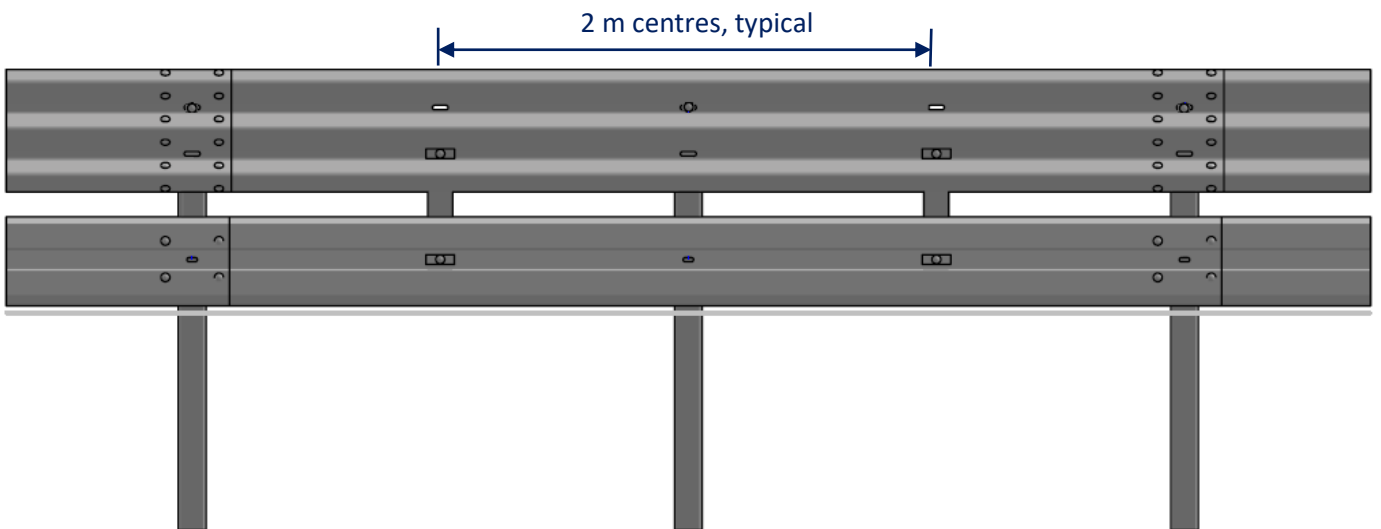

Attachment to RamShield® High Containment
FRONT VIEW

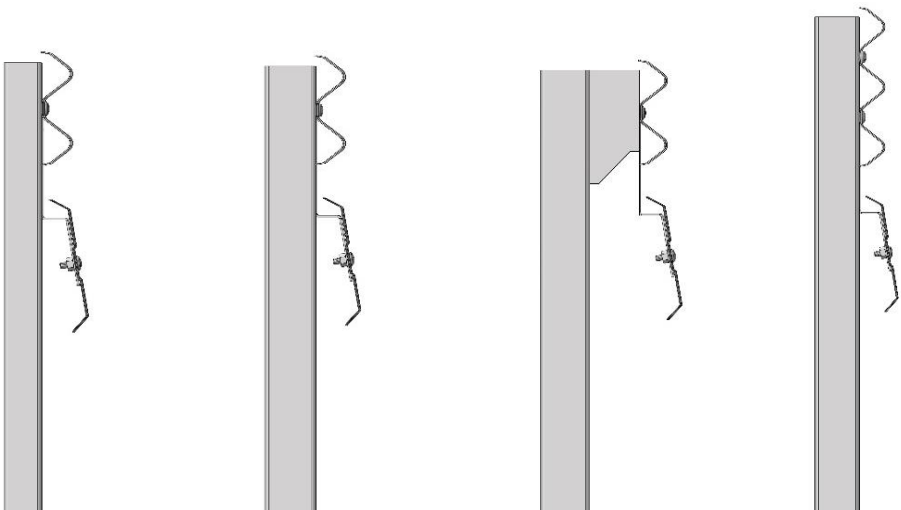

SIDE ELEVATIONS

The BikerShield™ panel and guardrail beam will always vertically align independent of guardrail post geometry and offset distance between the post and beam